

Client: Buckingham Group
Name: Salt Lane MSCP
Period: July 2019
Value: £235k
Location: Coventry
Works: Deck Waterproofing and Coloured Wearing Course and Lining Works



The Project

SL Construction Services were selected by **Buckingham Group** to install a protective Waterproofing and Anti-Skid system to the new car park at **Salt Lane MSCP, Coventry**.

The Works


A Reinforced system has been installed for **2,334m²** and **10,260m²** of Wearing Course to the Intermediate Decks.

The project has been successfully installed to include preparation of the concrete through enclosed blasting.

The last operation was to apply all white lining to the new **Deck Waterproofing System**.

Early involvement meant works were phased and planned to ensure the system was not damaged as construction work progressed ahead of programme.

All works were planned to strict environmental and safety guidelines prior to commencement.

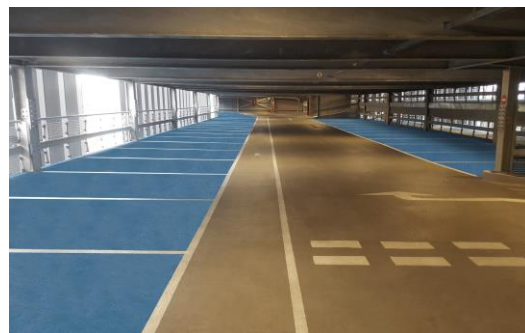

Completion

The rapid application as well as the speed of the on-site team ensured that the work was completed ahead of time. **SL Construction Services** provided a comprehensive package of technical, planning and quality assurance expertise to ensure smooth project delivery.

The long service life and ease of future maintenance of the products used **SL Construction Services** will provide a cost effective solution, complete protection and will reduce the car park's whole life carbon footprint.